


### Indicator Sets

Special Combination Set consisting of a permanent magnetic base and Model 'C' Dial Test Indicator which can be used to overcome many checking and gauging problems, both in the Workshop and Inspection Department.

The magnetic base has the following specification:

Diameter: 25mm (1")  
 Total Height: 75mm (3")  
 Magnetic Pull: 6.8kg (15lbs)

The T1 Indicator is available in either Imperial reading of 0.0005" or Metric reading of 0.01mm.

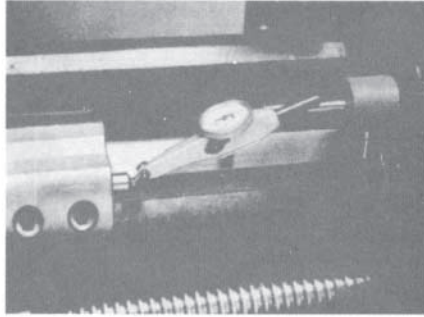

Specification

Code	Model Dia.	Dial	Read.	Grad. Length	Range	Stylus
10/ 7000	T1	1"	0.0005"	0-15-0	0.030"	0.514"
10/ 7001	T1mm	25mm	0.01mm	0-0.4-0	0.8mm	13.7mm


Set includes a model T1 Test Indicator in either Imperial or Metric graduations.

Code No. for the set is :

Imperial 18/ 2003


Metric 18/1003

### Recess Indicator

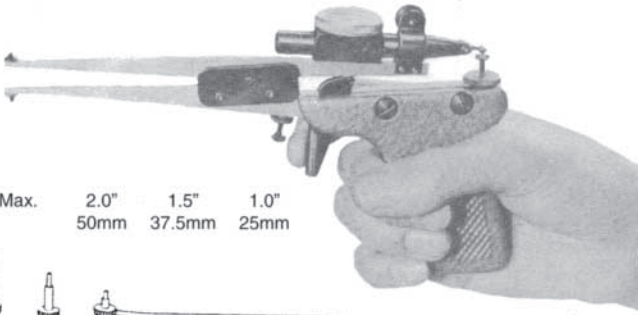


The Verdict internal type indicator is extremely useful for checking a wide variety of recesses, circlip grooves, etc, in either batch production of one-off components. The standard extensions supplied cover a range from 0.2"-6" (5.0mm - 150mm) but special sizes can be made to customers own requirements. Setting is accomplished by means of a micrometer or master ring. Easy zero adjustment by rotating test indicator bezel. Length of arm 4-7/8" (125mm). Dovetail clamp fits most test indicator models.

Max. 2.0" 1.5" 1.0"  
 50mm 37.5mm 25mm

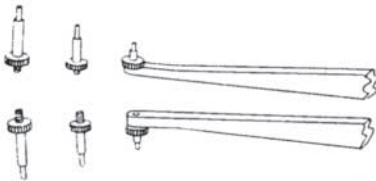

Min. 1.5" 1.0" 0.5"  
 37.5mm 25mm 12.5mm

DESCRIPTION – Standard Points, Pair  
 Long Standard Points, Pair  
 Ball Points, Pair  
 Offset Points, Pair  
 Set of 4 extensions (1/4", 1/2", 3/4", 1")

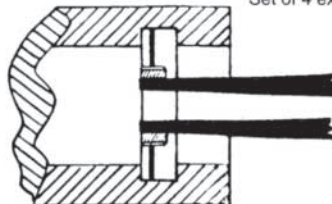

A line drawing showing the extensions of the recess indicator in position.

### Specification

19/2021 Inch 0.0005"  
 19/1021 Metric 0.01mm